

20. 08. 2004



INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

RECEIVED

31 AUG 2004

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

5 July 2004

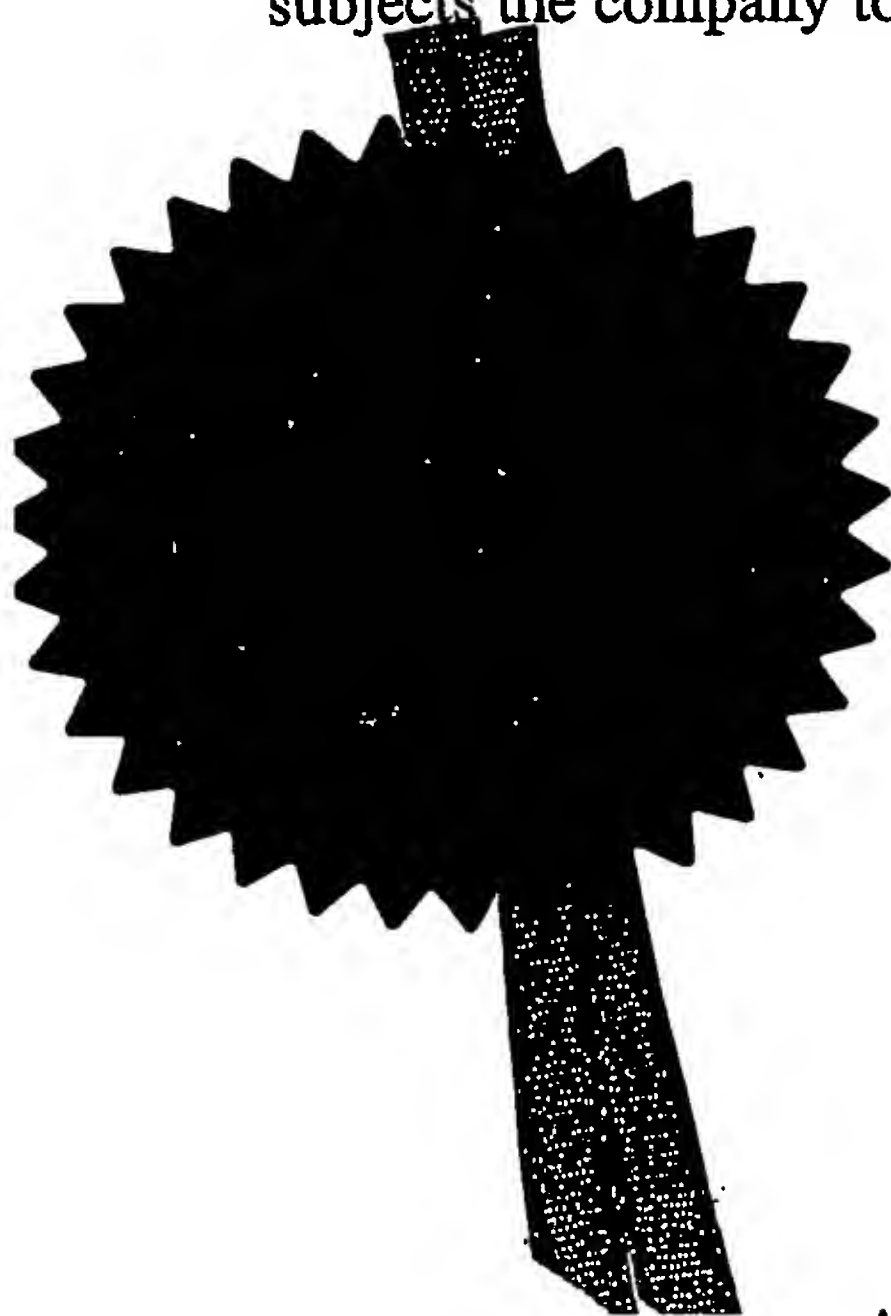



GB 0315366.5

By virtue of a direction given under Section 32 of the Patents Act 1977, the application is proceeding in the name of:

MARCONI UK INTELLECTUAL PROPERTY LTD,
PO Box 53,
New Century Park,
Coventry,
CV3 1HJ,
United Kingdom

Incorporated in the United Kingdom,

[ADP No. 08660763001]

Patents Form P1/77

Patents Act 1977
(Rule 16)

THE PATENT OFFICE
CF

- 1 JUL 2003

RECEIVED BY FAX

The
**Patent
Office**

01JUL03 F819276-1 000314
P01/770010.00/0315366.5

Effective

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

1. Your reference

P/63939.GBA/AF

2. Patent application number
(The Patent Office will fill in this part)

0315366.5

1 JUL 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Marconi Communications Limited
New Century Park
P.O. Box 53
Coventry
West Midlands

SECTION 30(1) APPLICATION FILED 30/10/03
751 920 000 1

Patents ADP number (if you know it)

If the applicant is a corporate body, give the Country/state of its incorporation

4. Title of the invention

Improvements in or relating to Communication Systems

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

Marconi Intellectual Property
Crompton Close
Basildon
Essex
SS14 3BA

8808321001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:
a) any applicant named in part 3 is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body.
See note (d))

Yes

Patents Form P1/77

0073330 01 Jul 03 04 31

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form 0

Description 16

Claim(s) 5

Abstract 0

Drawings 1 only

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

C. F. Hoste

Date

Colin Hoste

01.07.03

12. Name and daytime telephone number of person to contact in the United Kingdom

Anthony Ferns

01245 707606

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

DUPLICATE
P/63939/GPT

1

IMPROVEMENTS IN OR RELATING TO
COMMUNICATION SYSTEMS

5 The present invention relates to communication system, in particular a communication comprising a first network at the host site and a second network at a user site and means for the first network to monitor the functionality of network elements in the second network without placement of first network elements with the second network. More particularly, the first
10 network may be a synchronous digital hierarchy (hereinafter SDH) network and the second network may be an Ethernet network. There is also provided a method for the same.

Figure 1 illustrates a prior art managed communication system 10, wherein
15 there is provided a SDH network comprising interconnected SDH network elements 12 and 14 situated at a host site 16 and an SDH network element 18 situated at a user site 20. The functionality of the SDH network elements 12, 14 and 18 is monitored by a SDH network management system 22, connected to the SDH network elements 12, 14 and 18, and which is
20 arranged to either constantly or periodical assess the operation of all the SDH network elements 12, 14 and 18 and to report faults associated with the SDH network elements 12, 14 and 18.

The user site 20 has a Ethernet network situated thereat and a network termination element 24, connected to SDH network element 18, which is arranged to convert SDH format information at terminal 26 into Ethernet format information provided at terminal 28 which is fed into the Ethernet network. SDH format information is transported between SDH network elements 12, 14 and 18, via an SDH link 30 between the host 16 and user 20 sites to arrive at the network termination element 24. It will be understood that the network termination element 24 is also arranged to convert Ethernet format information received from the Ethernet network at terminal 28 into SDH format information, provided at terminal 26, for transportation over the SDH network elements 12, 14 and 18 and the SDH link 30.

Furthermore, it will be understood that the SDH network management system 22 can determine the functionality of the SDH network element 18 located at a user site 20 and whether or not the SDH format information has successfully been transported between the host 16 and user 20 sites via SDH link 30.

At the user site 20, the SDH network element 18 and the network termination element 24 can also be interconnected via channel 32 so that the SDH network element 18 can determine whether or not the network termination element 24 is functioning correctly, and importantly, whether or not Ethernet format information is present at the terminal 28 of the network termination element 24.

In this manner, the SDH network management system 22 can determine via interrogation of the SDH network element 18, which in turn interrogates the network termination element 24, whether or not Ethernet format information is present at terminal 28. Therefore, this communication system 10 is said to be managed as the SDH network management system 22 can determine from the host site 16 whether or not Ethernet format information is present at terminal 28.

However, it will be noted that this type of communication system 10 requires that a SDH network element 18 be present at the user site 20 and that a SDH link 30 be connected between the host 16 and the user 20 sites to transport what is essentially Ethernet information in SDH format. This is an expensive means of ensuring that the SDH network management system 22 has visibility of the functionality of terminal 28 at the user site 20.

An alternative to the managed communication system illustrated in Figure 1 is the implementation of a cheaper non-managed prior art communication system 40, as illustrated in Figure 2. Communication system 40 comprises a SDH network having interconnected SDH network elements 42 and 44 situated at a host site 46. The functionality of the SDH network elements 42 and 44 is monitored by a SDH network management system 48, connected to the SDH network elements 42 and 44, and which is arranged to either constantly or periodically assess the operation of all the SDH network elements

42 and 44 and to report faults associated with the SDH network elements 42 and 44.

5 A user site 50 has an Ethernet network situated thereat and an opto-electrical converter 52 which is arranged to convert optical Ethernet format information at terminal 54 into electrical Ethernet format information provided at terminal 56 which is fed into the Ethernet network. Ethernet format information is transported between SDH network element 44 and the opto-electrical converter 52 via a network termination element 58, located at the host site 46, and connected to SDH network element 44. The network termination element is arranged to convert SDH format information at terminal 60 into optical Ethernet format information provided at terminal 62. The Ethernet format information is then transported between the host 46 and user 50 sites via Ethernet link 64 to arrive at terminal 54 of the opto-electrical converter 52.

15

It will be understood that the opto-electrical converter 52 is also arranged to convert electrical Ethernet format information received from the Ethernet network into optical Ethernet format information that can be transported via Ethernet link 64 to network termination element 58. Furthermore, the network termination element 58 is also arranged to convert optical Ethernet format information received from the Ethernet network, via the Ethernet link 64, into SDH format information for transportation over the SDH network elements 42 and 44.

20

At the host site 46, the SDH network element 44 and the network termination element 58 may also be interconnected via channel 66 so that the SDH network element 44 can determine whether or not the network termination element 58 is functioning correctly and whether or not Ethernet format information is present at the terminal 62 of the network termination element 58.

In this manner, the SDH network management system 48 can determine via interrogation of the SDH network element 44, which in turn interrogates the network termination element 58, whether or not Ethernet format information is present at terminal 62.

However, it will be noted that in this communication system 40, the SDH network management system 48 can only determine the functionality of the SDH network elements 42 and 44 and network termination element 58 located at a host site 46 and has no means to determine whether or not the Ethernet format information has successfully been transported between the host 46 and user 50 sites via Ethernet link 64, or that the opto-electrical converter 52 is functioning correctly or that electrical Ethernet format information is present at terminal 56.

Therefore, this communication system 40 is said to be unmanaged as the SDH network management system 48 cannot determine from the host site 46

whether or not Ethernet format information is present at the terminal 56 at the user site 50.

It is an object of the present invention to obviate or mitigate the disadvantages associated with the prior art.

According to a first aspect of the present invention, a communication system, comprises an SDH network and an Ethernet network, the SDH network having an SDH network management system to monitor the functionality of network elements in the SDH network, the SDH network being arranged to transport at least Ethernet information in SDH format across the SDH network, the SDH network being at least partially situated at a host site and the Ethernet network being situated at a user site, the SDH network comprising a SDH network element arranged to convert the SDH format Ethernet information into Ethernet format information for transportation between the host and user sites via a link between the host and user sites, and the Ethernet network comprising a Ethernet network element to receive the Ethernet format information, wherein the SDH network element can request the status of the Ethernet network element when the SDH network element is required to update the SDH network management system with status information on the functionality of the SDH network element and Ethernet network element.

In this manner, only the SDH network management system is extended to monitor the functionality of the Ethernet network elements located at the remote user site without having to extend the SDH network in its entirety to the remote site. That is, there are no SDH network elements present at the user site, but the SDH network management system can determine whether or not the Ethernet network element is functioning correctly and that there is Ethernet format information presented to the Ethernet network element. Accordingly, there is a cost saving over the prior art in that SDH network elements, which are more expensive than an Ethernet network element, do not have to be situated at the user site to implement a managed SDH and Ethernet network.

Preferably, the SDH network element may comprise network termination equipment. The network termination equipment may comprise an SDH multiplexer and an associated Ethernet conversion card.

The SDH network element may be arranged to request the status of the Ethernet network element by transmitting the request for status within the format of an Ethernet frame transported over the link. Alternatively, the SDH network element may be arranged to request the status of the Ethernet network element by transmitting a request for status between successive Ethernet frames transported over the link.

The Ethernet network element may be arranged to provide a response to the request for status from SDH network element by transmitting the response within the format of an Ethernet frame transported over the link. Alternatively, the Ethernet network element may be arranged to provide a response to the request for status from SDH network element by transmitting the response between successive Ethernet frames transported over the link.

Preferably, link may be a point-to-point optical link. Furthermore, the Ethernet network element may comprise an opto-electrical converter.

10

The SDH network element may be further arranged to convert Ethernet format information received from the Ethernet network into SDH format information for transportation across the SDH network.

15

According to another aspect of the invention there is provided a method of communicating for a SDH network and an Ethernet network, the method comprising monitoring the functionality of network elements in the SDH network using an SDH network management system, arranging the SDH network to transport at least Ethernet information in SDH format across the SDH network, situating the SDH network at least partially at a host site and situating the Ethernet network at a user site, arranging a SDH network element of the SDH network to convert the SDH format Ethernet information into Ethernet format information and transporting the Ethernet format information between the host and user sites via a link between the host and

20

user sites, and receiving the Ethernet format information with a Ethernet network element at the Ethernet network, whereby the SDH network element can request the status of the Ethernet network element when the SDH network element is required to update the SDH network management system with status information on the functionality of the SDH network element and/or Ethernet network element.

According to a third aspect of the invention a communication system, comprises an first network and a second network, the first network having an network management system to monitor the functionality of network elements in the first network, the first network being arranged to transport at least some information intended for the second network across the first network in a format compatible with the first network, the first network being at least partially situated at a host site and the second network being situated at a user site, the first network comprising a network element arranged to convert the format of the information intended for the second network into second network format information compatible with the second network for transportation between the host and user sites via a link between the host and user sites, and the second network comprising a network element to receive the second network format information wherein the network element of the first network can request the status of the network element of the second network when the network element of the first network is required to update the network management system of first network with status

information on the functionality of the network element of the first network and/or the network element of the second network.

According to a fourth aspect of the invention there is provided a method of
5 communicating for a first network and a second network, the method comprising monitoring the functionality of network elements in the first network using a network management system, arranging the first network to transport at least some information intended for the second network across the first network in a format compatible with the first network, situating the first
10 network at least partially at a host site and situating the second network at a user site, arranging a network element of the first network to convert the format of the information intended for the second network into second network format information compatible with the second network and transporting the second network format information between the host and
15 user sites via a link between the host and user sites, and receiving the second network format information at the second network with a network element of the second network, whereby the network element of the first network can request the status of the network element of the second network when the network element of the first network is required to update the
20 network management system of first network with status information on the functionality of the network element of the first network and/or the network element of the second network.

The invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

Figure 1 illustrates a first prior art communication system comprising an SDH network and a managed Ethernet network;

Figure 2 illustrates a second prior art communication system comprising an SDH network and a non-managed Ethernet network, and

Figure 3 illustrates an embodiment of the communication system according to the present invention.

Referring to Figure 3, there is shown a communication system 70 according to the present invention, wherein there is provided a SDH network 72 (note only partially illustrated) comprising interconnected SDH network elements 74 and 76 situated at a host site 78, for example a local exchange. The functionality of the SDH network elements 74 and 76 is monitored by a SDH network management system 78, connected to the SDH network elements 74 and 76, and which is arranged to either constantly or periodical assess the operation of all the SDH network elements including network elements 74 and 76 and to report faults associated with the SDH network elements including network elements 74 and 76.

A user site 80 has an Ethernet network 82 situated thereat and a user network termination element 84 which is arranged to convert optical Ethernet format information at terminal 86 into electrical Ethernet format information provided at terminal 88 which is then fed into the Ethernet network 82.

5

Ethernet format information is transported between SDH network element 76 and the user network termination element 84 via a host network termination element 90, located at the host site 78, and connected to SDH network element 76. The host network termination element 90 is arranged to convert SDH format information at terminal 92 into optical Ethernet format information provided at terminal 94. The Ethernet format information is then transported between the host 78 and user 80 sites via Ethernet link 96 to arrive at terminal 86 of the user network termination element 84.

10

It will be understood that the communication system 70 is bi-directional, that is that the user network termination element 84 is also arranged to convert electrical Ethernet format information received from the Ethernet network 82 into optical Ethernet format information that can be transported via Ethernet link 96 to the host network termination element 90 and that the host network termination element 90 is also arranged to convert the optical Ethernet format information received from the Ethernet network 82, via the Ethernet link 96, into SDH format information for transportation over the SDH network 72.

15

20

At the host site 78, the SDH network element 76 and the host network termination element 90 are interconnected via channel 98 so that the SDH network element 76 can determine whether or not the host network termination element 90 is functioning correctly and whether or not optical Ethernet format information is present at terminal 94 of the host network termination element 90. Furthermore, the SDH network element 76 and the user network termination element 84 are interconnected via channel 100 so that the SDH network element 76 can determine whether or not the user network termination element 84 is functioning correctly and whether or not electrical Ethernet format information is present at terminal 94 of the host network termination element 90. It will be noted that channels 98 and 100 could be the same channel with appropriate coding or two separate channels.

Host termination element 90 could be a SDH multiplexer and associated Ethernet interface card arranged to communicate with SDH network element 76 over channel 98. The user network termination element 84 could be an Ethernet media-converter arranged to also communicate with the SDH network element 76 over channel 100.

It will be noted the SDH network element 76 could be arranged to request the status of the user termination element 84 by transmitting a request for status as part of the format of an Ethernet frame transported over the Ethernet link 96 and the user termination element 84 could be arranged to provide a response to the request for status from SDH network element 76 by

transmitting the response as part of the format of an Ethernet frame transported over the Ethernet link 96.

Alternatively, the SDH network element 76 could be arranged to request the status of the user termination element 84 by transmitting a request for status between successive Ethernet frames transported over the Ethernet link and the user termination element 84 could be arranged to provide a response to the request for status from SDH network element 76 by transmitting the response between successive Ethernet frames transported over the Ethernet link.

It will of course be understood that a combination of the above described transportation techniques for the request for status from the user termination element 84 and response with status information from the user termination element 84 could be deployed in the communication system 70.

In this manner, the SDH network management system 78 can determine via interrogation of the SDH network element 76, which in turn interrogates the host network termination element 90, whether or not optical Ethernet format information is present at terminal 94 and the network management system 78 can determine via interrogation of the SDH network element 76, which in turn interrogates the user network termination element 94, whether or not electrical Ethernet format information is present at terminal 88.

It will be noted that the SDH network management system 78 can also determine via interrogation of the SDH network element 76, which in turn interrogates the host network termination element 90 and/or the user network termination element 94, a number of different status indicators, including, but
5 not limited to carrier sense error, deferred transmissions, excessive collisions, frame check sequence errors, excessive frame lengths, internal media access channel receive errors, late collision frame, multiple collision frames, correct total broadcast frames received, correct total frames received, correct total frames transmitted, correct total multicast frames received and correct unicast
10 frames received.

Therefore, this communication system 70 comprises a Ethernet network 82, the input to which is managed via the SDH network management system 78 as the latter can determine from the host site 78 whether or not Ethernet
15 format information is present at terminal 84 at the user site 80. Accordingly, since the communication system 40 as described above with reference to Figure 2, does not provide such a facility the present invention is considered to be an improvement over that communication system 40.

20 Furthermore, it will be noted that this invention does not require that a SDH network element 18 be present at the user site 20 and that a SDH link 30 be connected between the host 16 and the user 20 sites to transport what is essentially Ethernet information in SDH format, as described with reference to

the communication system 10 in Figure 1. Therefore, again, the present is considered an improvement over that communication system 10.

It will be understood that in relation to the invention, the term "information"
5 can mean communication, message, frame or traffic.

CLAIMS

1. A communication system, comprising an SDH network and an Ethernet network, the SDH network having an SDH network management system to monitor the functionality of network elements in the SDH network, the SDH network being arranged to transport at least Ethernet information in SDH format across the SDH network, the SDH network being at least partially situated at a host site and the Ethernet network being situated at a user site, the SDH network comprising a SDH network element arranged to convert the SDH format Ethernet information into Ethernet format information for transportation between the host and user sites via a link between the host and user sites, and the Ethernet network comprising a Ethernet network element to receive the Ethernet format information, wherein the SDH network element can request the status of the Ethernet network element when the SDH network element is required to update the SDH network management system with status information on the functionality of the SDH network element and/or Ethernet network element.
2. A communication system, as claimed in Claim 1, wherein the SDH network element comprises network termination equipment.

3. A communication system, as claimed in Claim 2, wherein the network termination equipment comprises an SDH multiplexer and an associated Ethernet conversion card.
4. A communication system, as claimed in any preceding claim, wherein the SDH network element is arranged to request the status of the Ethernet network element by transmitting the request for status within the format of an Ethernet frame transported over the link.
5. A communication system, as claimed in Claims 1 to 3, wherein the SDH network element is arranged to request the status of the Ethernet network element by transmitting a request for status between successive Ethernet frames transported over the link.
6. A communication system, as claimed in either Claim 4 or Claim 5, wherein the Ethernet network element is arranged to provide a response to the request for status from SDH network element by transmitting the response within the format of an Ethernet frame transported over the link.
7. A communication system, as claimed in either Claim 4 or Claim 5, wherein the Ethernet network element is arranged to provide a response to the request for status from SDH network element by transmitting the response between successive Ethernet frames transported over the link.

8. A communication system, as claimed in any preceding claim, wherein the link is a point-to-point optical link.
9. A communication system, as claimed in any preceding claim, wherein the Ethernet network element comprises an opto-electrical converter.
10. A communication system, as claimed in any preceding claim, wherein the SDH network element is further arranged to convert Ethernet format information received from the Ethernet network into SDH format information for transportation across the SDH network.
11. A Communication system substantially as illustrated in and/or described with reference to the accompanying drawings.
12. A method of communicating for a SDH network and an Ethernet network, the method comprising monitoring the functionality of network elements in the SDH network using an SDH network management system, arranging the SDH network to transport at least Ethernet information in SDH format across the SDH network, situating the SDH network at least partially at a host site and situating the Ethernet network at a user site, arranging a SDH network element of the SDH network to convert the SDH format Ethernet information into Ethernet format information and transporting the Ethernet format information between the host and user sites via a link between the host and user sites, and receiving the Ethernet format

information with a Ethernet network element at the Ethernet network, whereby the SDH network element can request the status of the Ethernet network element when the SDH network element is required to update the SDH network management system with status information on the functionality of the SDH network element and/or Ethernet network element.

13. A method of communicating substantially as illustrated in and/or described with reference to the accompanying drawings.

14. A communication system, comprising an first network and a second network, the first network having an network management system to monitor the functionality of network elements in the first network, the first network being arranged to transport at least some information intended for the second network across the first network in a format compatible with the first network, the first network being at least partially situated at a host site and the second network being situated at a user site, the first network comprising a network element arranged to convert the format of the information intended for the second network into second network format information compatible with the second network for transportation between the host and user sites via a link between the host and user sites, and the second network comprising a network element to receive the second network format information wherein the network element of the first network can request the status of the network element of the second

network when the network element of the first network is required to update the network management system of first network with status information on the functionality of the network element of the first network and/or the network element of the second network.

15. A method of communicating for a first network and a second network, the method comprising monitoring the functionality of network elements in the first network using a network management system, arranging the first network to transport at least some information intended for the second network across the first network in a format compatible with the first network, situating the first network at least partially at a host site and situating the second network at a user site, arranging a network element of the first network to convert the format of the information intended for the second network into second network format information compatible with the second network and transporting the second network format information between the host and user sites via a link between the host and user sites, and receiving the second network format information at the second network with a network element of the second network, whereby the network element of the first network can request the status of the network element of the second network when the network element of the first network is required to update the network management system of first network with status information on the functionality of the network element of the first network and/or the network element of the second network.

P/63939/GPT

1/1

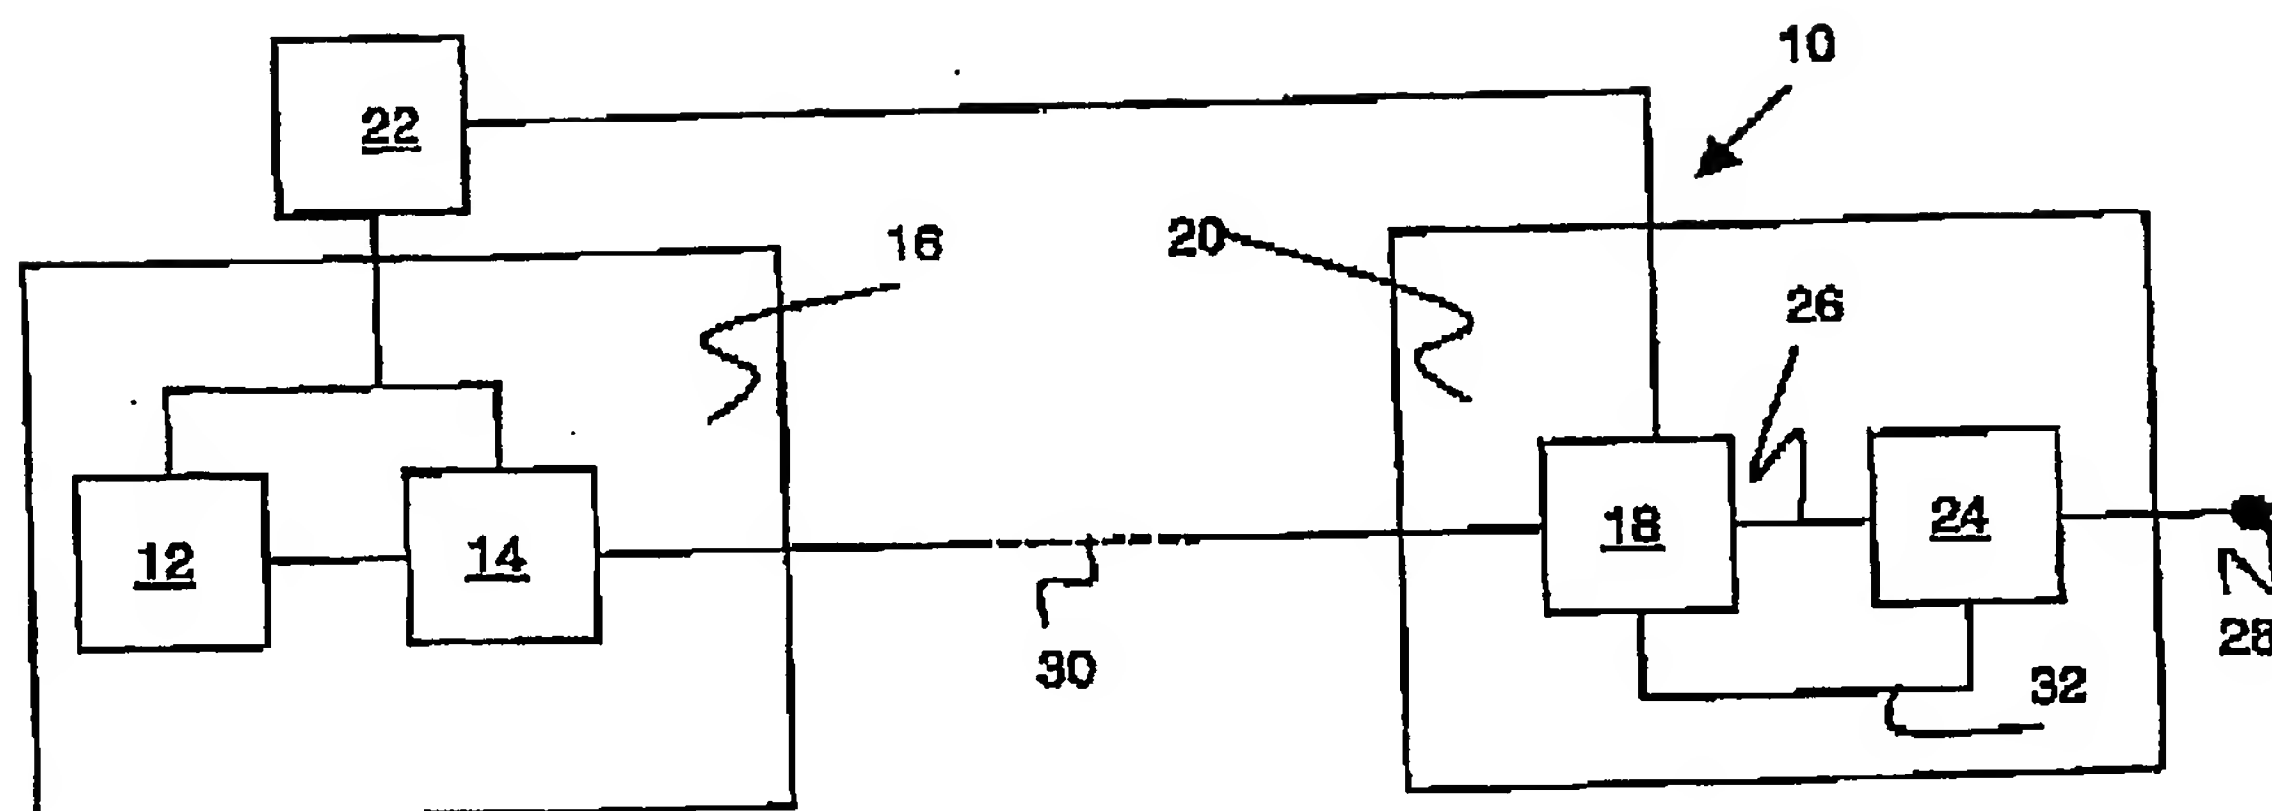


Fig. 1

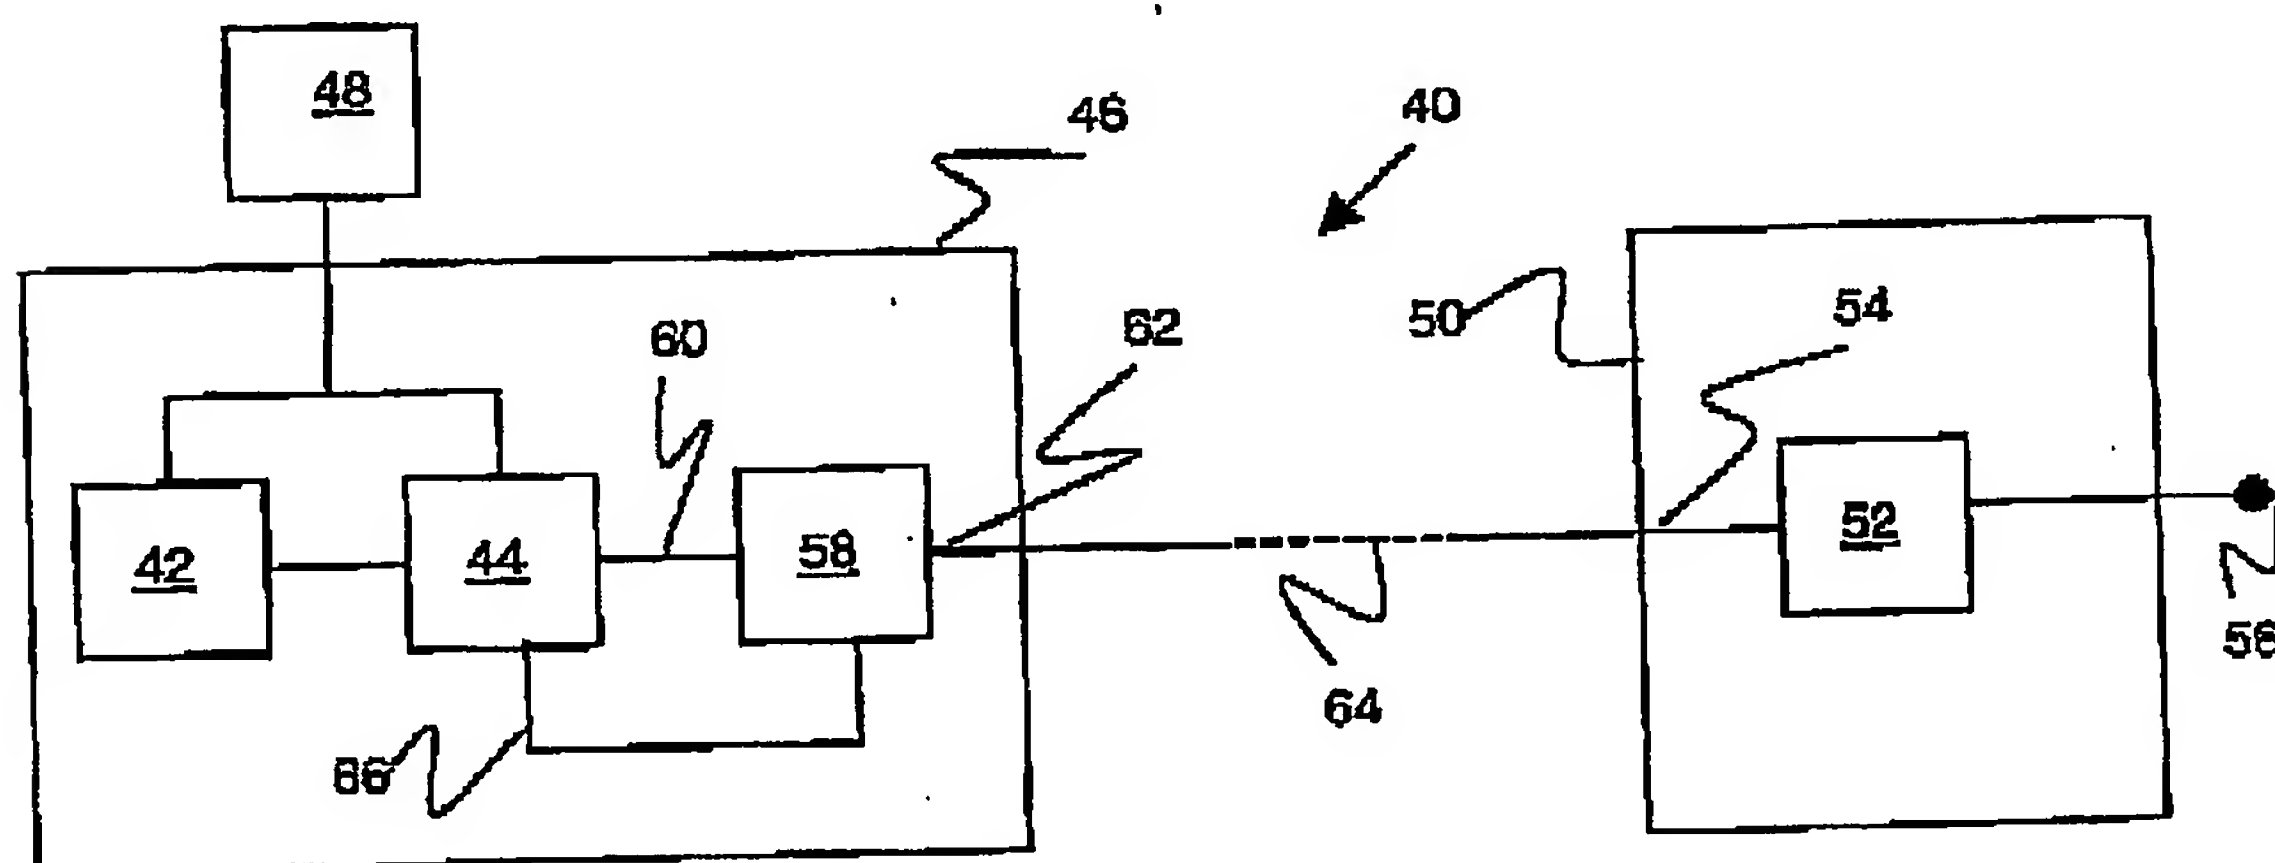


Fig. 2

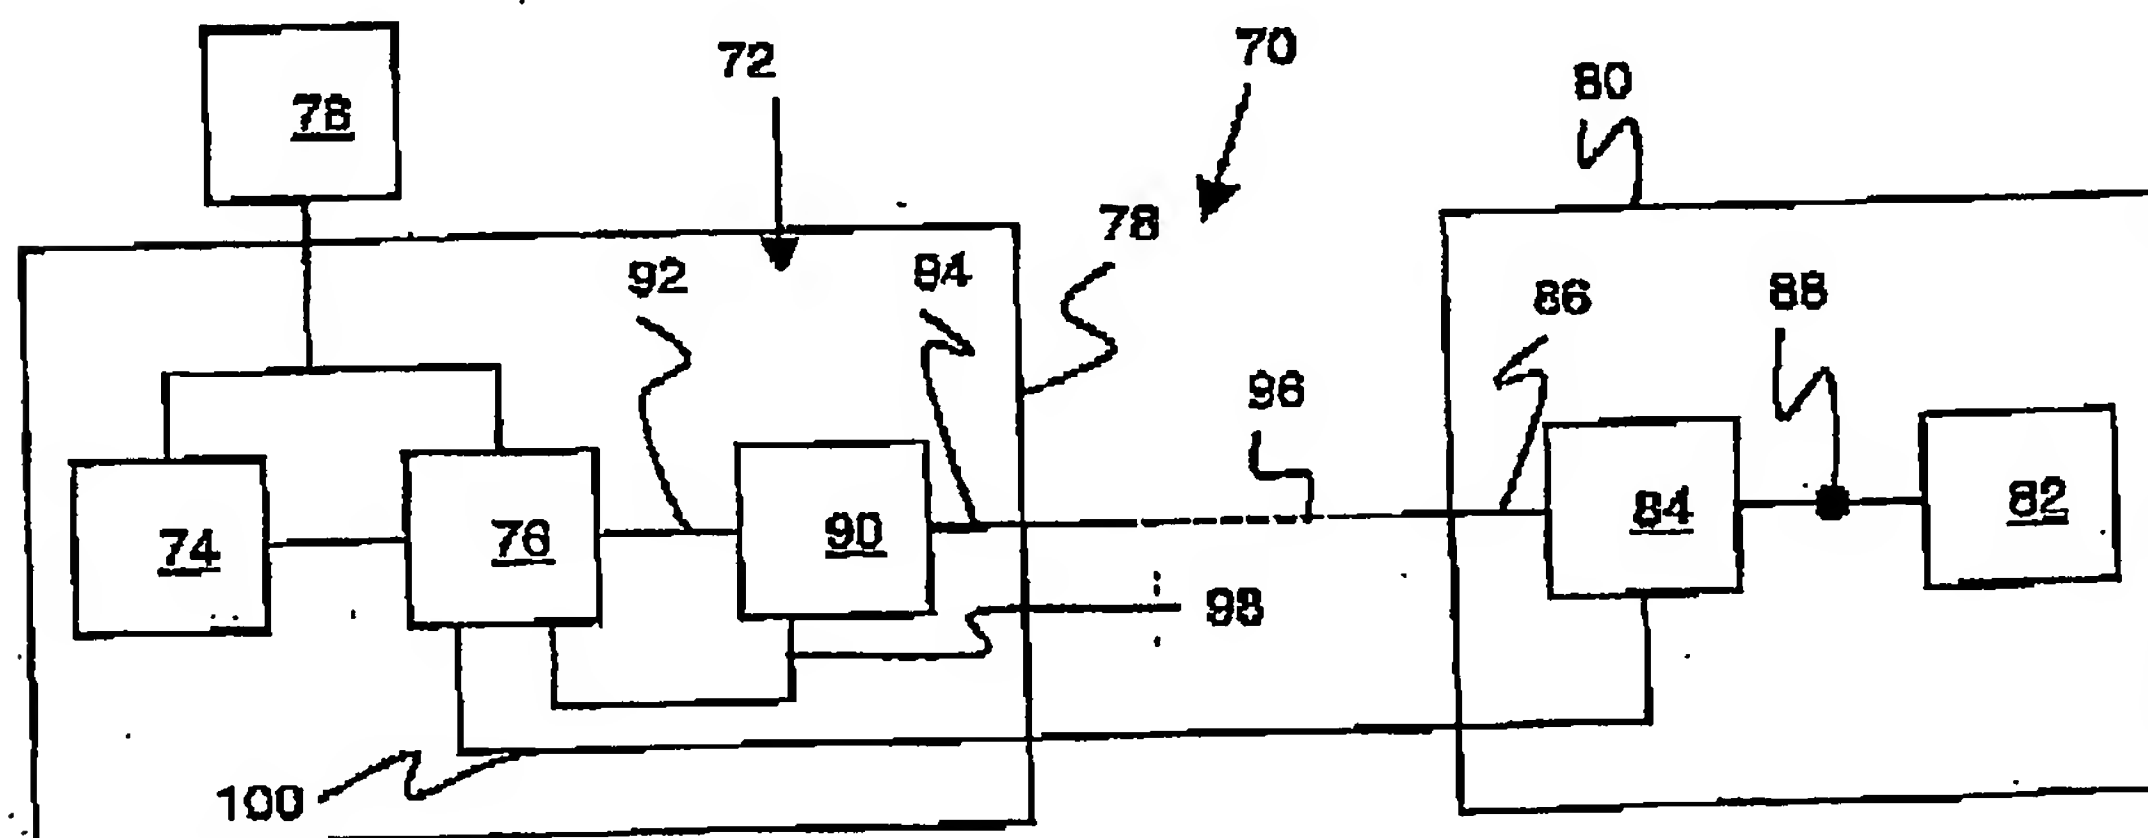


Fig. 3



23

SPO

PCT/EP2004/051279



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☒ FADED TEXT OR DRAWING

☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.